


FS300 PROFESSIONAL SERIES FLOOR SAW BLADE

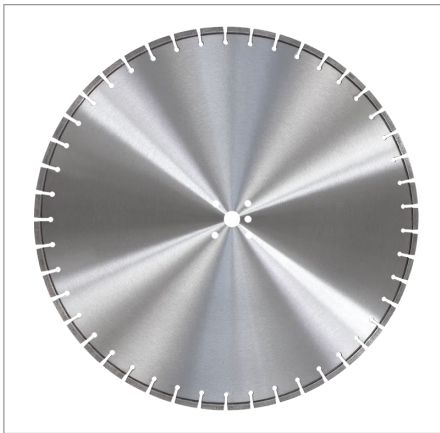

PROFESSIONAL SERIES

PROFESSIONAL SERIES CONCRETE BLADE

The **FS300 Professional Series Blade** is engineered for professional contractors requiring maximum versatility and consistent performance across a wide range of concrete cutting applications. Multiple bond hardnesses and diamond concentrations are available to optimize cutting speed, blade life, and productivity for varying aggregate types and concrete hardness. Available in six bond specifications (Very Soft, Soft, Medium Soft, Medium, Medium Hard, and Hard) to match different concrete cutting conditions. Manufactured in **35CON**, **40CON**, and **50CON** performance grades for optimum performance in demanding commercial applications.

APPLICATION

Concrete

EQUIPMENT

Floor Saw

TECHNICAL SPECIFICATIONS

SEGMENT HEIGHT 10 mm (.394")

ARBOR

1" Drive Pin

MOUNTING PATTERN LOU (12"-36") • LOU/ROG (42"-60")

CUTTING METHOD

Wet

BOND AVAILABILITY Very Soft • Soft • Medium Soft • Medium
Medium Hard • Hard

CONCENTRATION

35CON • 40COM • 50CON

AVAILABLE SIZES

DIAMETER	AVAILABLE SEGMENT WIDTHS	MOUNTING
12"	.125", .155", .187", .250"	LOU
14"	.125", .165", .187", .250"	LOU
16"	.125", .165", .187", .250"	LOU
18"	.125", .165", .187", .250"	LOU
20"	.125", .165", .187", .250"	LOU
24"	.125", .165", .187", .220", .250"	LOU
26"	.165", .187", .220", .250"	LOU
28"	.155", .165", .187", .220", .250"	LOU
30"	.155", .165", .220", .250"	LOU
36"	.155", .165", .187", .220", .250"	LOU
42"	.187", .220", .250"	LOU/ROG
48"	.187", .220", .250"	LOU/ROG
54"	.187", .220", .250"	LOU/ROG
60"	.187", .220", .250"	LOU/ROG

Other diameters and segment thicknesses with 12 mm (.472") segment height are available upon request. Available in 35CON, 40CON and 50CON.

STANDARD ARBOR CONFIGURATION

The standard mounting pattern is automatically selected based on blade diameter. Alternate arbor configurations are available upon request.